



VISTA PROTOS^{IV} STANDARD MONOCHROME RANGE



IDEAL FOR APPLICATIONS SUCH AS:

- Retail
- Shopping centres
- Office blocks
- Schools
- Warehouses

VISTA PROTOS - EUROPE'S FAVOURITE CAMERA

With a completely new look and feel across the entire range, Protos^{IV} cameras are amongst the most stylish and technically proven cameras for internal and external installations available today, regardless of the intended application or surrounding lighting conditions.

A selection of 8 cameras are available in Vista's standard monochrome camera line up, offering standard and high resolution in 1/3 & 1/2" CCD options, with sensitivity @ 0.06 lux and fully IR sensitive, matched with Vista's range of IR corrected lenses these state of the art cameras, are the ideal choice for your covert applications.

Highly featured these cost effective, highly reliable cameras provide outstanding functionality, whilst designed to be easy to install and configure. With 8 options in this range, ensuring a camera will be available to suit any standard monochrome application.

Finally, two models in this range come with built in NVT twisted pair transmitters. Used correctly in conjunction with an active receiver, crystal clear images can be effectively transmitted up to distances of one mile.

MAIN FEATURES:

- 1/3" & 1/2" versions
- 380 & 580TVL versions
- 0.06 lux sensitivity
- AGC & BLC on/off
- Integrated NVT technology, compatible with NVT's wide range of receivers (VPM132/TP)
- AI/DD single auto sensing socket
- Easy back-focus via thumb wheel
- 98-260V AC or 11 - 40V DC / 12 - 30V AC

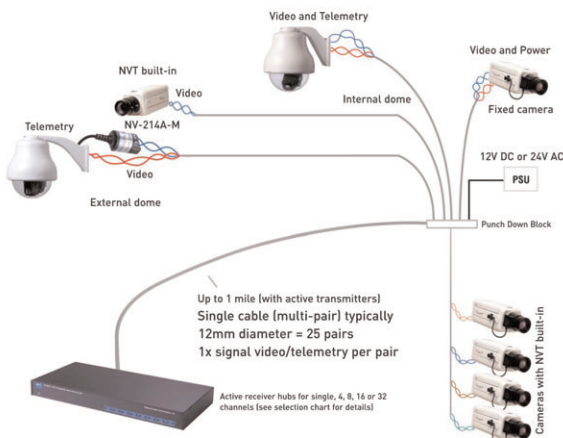


Diagram refers to VPC132/CM/TP & VPC130/CM/TP



VISTA
VPC130/CM CAMERA
RATING - 90%
Tested: Benchmark May/June 2006



THE UK'S PREMIER CCTV BRAND



TECHNICAL SPECIFICATION

	VPM032 VPM030	VPM132 VPM130	VPM132/TP VPM130/TP	VPM122 VPM120
SENSOR (CCD)	1/3"			1/2"
RESOLUTION (SUPER HAD)	380TVL	580TVL		
SENSITIVITY @ F1.2	0.06 lux	0.07 lux		0.06 lux
PIXELS	500 x 582	752 x 582		
COLOUR/MONOCROME	N/A			
SIGNAL/NOISE RATIO	>50dB AGC Off			
NVT	No	Yes	No	
SYNC. SYSTEM	INT/line lock adjust via push buttons			
BACK LIGHT COMP	On/off Selectable			
IRIS MODE	Video / Direct (auto sensing) / ESC selectable			
SHUTTER SPEED	Auto - 1/50 - 1/100,000			
GAMMA	0.45			
AGC	AGC On/off			
AMBIENT TEMP	-10°C + 50°C			
DIMENSIONS	132 x 65 x 62mm			
WEIGHT	425g			
VOLTAGE	11 - 40V DC / 12 - 30V AC 98 - 260V AC < 4W			

ORDERING INFORMATION

VPM032	1/3", 380TVL, 0.06 LUX MONOCROME CAMERA, 11-40V DC/12-30V AC
VPM030	1/3", 380TVL, 0.06 LUX MONOCROME CAMERA, 98-260V AC
VPM132	1/3", 580TVL, 0.07 LUX MONOCROME CAMERA, 11-40V DC/12-30V AC
VPM130	1/3", 580TVL, 0.07 LUX MONOCROME CAMERA, 98-260V AC
VPM132/TP	1/3", 580TVL, 0.07 LUX MONOCROME CAMERA, TWISTED PAIR, 11-40V DC/12-30V AC
VPM130/TP	1/3", 580TVL, 0.07 LUX MONOCROME CAMERA, ACTIVE TWISTED PAIR, 98-260V AC
VPM122	1/2", 580TVL, 0.06 LUX MONOCROME CAMERA, 11-40V DC/12-30V AC
VPM120	1/2", 580TVL, 0.06 LUX MONOCROME CAMERA, 98-260V AC

ASSOCIATED PRODUCTS



Varifocal lenses VDD35V814Pe, VDD5V5014Pe and VDD20V10014P etc.



12V DC PSU's VPSU500/12 & VPSU1000/12

24V AC PSU's VPSU24VAC/750, VPSU24VAC/2000 & VPSU24VAC/4000 etc.



Wall brackets VCMB, Protos B1, Protos B2 etc.



External housings VCMHF, VSCMHF & VLHE300W

DISTRIBUTED BY:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



VISTA NORBAIN HOUSE, ESKDALE ROAD, WINNERSH TRIANGLE, WOKINGHAM, BERKSHIRE. RG41 5TS
TELEPHONE: +44 (0) 118 944 0123 FAX: +44 (0) 118 944 0999
WEBSITE: WWW.VISTA-CCTV.COM